

PCT/SCO/07000

84-123261/20

D11

YOSH/30.09.82

D(1-A2)

YOSHIOKA M

*J5 9059-133-A

100

30.09.82-JP-169607 (04.04.84) A21c-03/04


Device for discharging dough in band form - comprises a screw in a cylinder provided with a dough hopper and rotary roller on top of cylinder

C84-051962


Device comprises a screw (4) in a cylinder (1) provided with a dough hopper (3), and a rotary roller (7) provided at the top of the cylinder (1). Dough (2) transferred to the screw (4) from the hopper (3) is discharged onto a belt conveyor (14) compressed by the roller (7) rotating in the same direction as the belt conveyor.

By adjusting the revolutions of the roller (7) to the discharge rate of dough, the dough can be discharged without being subjected to excessive stresses.

Dough may be discharged at a constant rate providing a constant width and thickness. (3pp Dwg.No.1,2/2)

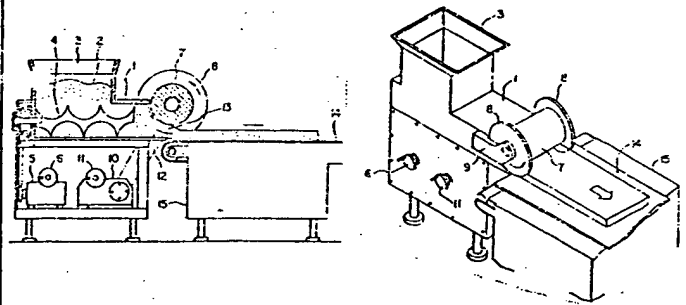

第 1 図

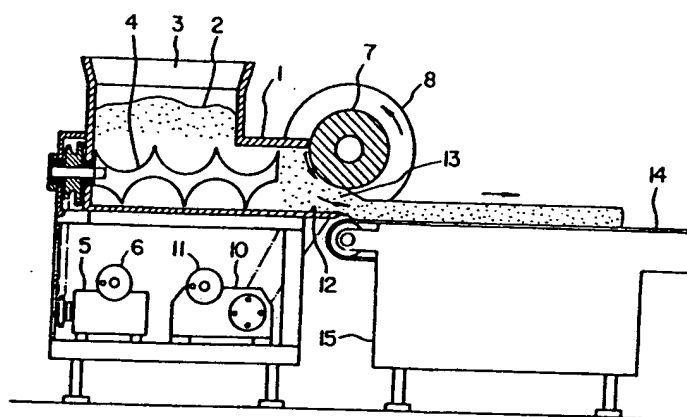

第 2 図

